





ISSUE	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Ding	2024/01/01	JIM.KING

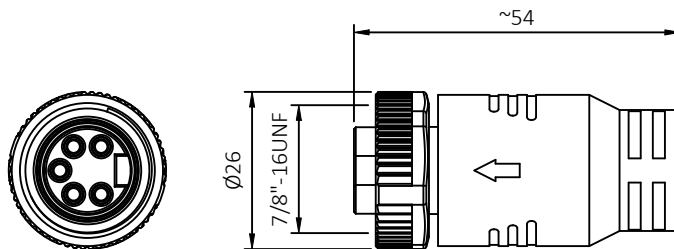

Wire List

PIN 1	_____	N/C
PIN 2	_____	N/C
PIN 3	_____	N/C
PIN 4	_____	1/4W 120Ω Resistor
PIN 5	_____	

General Specifications:

Connector : 7/8"-16UNF 5P Female  
 Locking: Screw Connection  
 Termination: Solder Cup

Electrical:

Rated Voltage: 300V AC/DC  
 Rated Current: 8A  
 Contact Resistance:  $\leq 5m\Omega$   
 Insulation Resistance:  $\geq 100M\Omega$

Mechanical:

Mating Cycles: min 500  
 Temperature Range: -25 to 80° C  
 Degree of Protection: IP67

Material:

Coupling nut: Zinc Alloy, Electroless Nickel  
 Insulator: TPU black  
 Contacts: Brass, Gold Plated  
 Seal: Rubber, black  
 Body Molding: PVC, Yellow  
 Resistor :1/4W 120Ω ±1%

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	 东莞市德索精密工业有限公司 <small>CONNECTOR &amp; CABLE ASSEMBLY</small>				
	PART DESCRIPTION: 7/8" 5P Female Terminator				
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm	Appr:	JIM.KING	P/N:	RHT-634-3398	
	Check:		Date	Scale	Unit
	Draw:	DING	2024.01.01	Free	MM
				Type	Page
					1/1